


Speedboard

Pump driver ON-BOARD assembled for a single pump with variable speed.

Single-phase or 3-phase pumps managed by INVERTER. General electrical supply is single-phase and 3-phase ~3x230 or ~3x400 Vac -depending on model. It can be mounted individually or in groups of 4 pumps communicated and operating in MASTER-SLAVE mode with alternated sequence of operation. It will be installed over connection box of the motor through a wide range of fastenings.



1006 MT
1010 MT
1106 MM
1112 MM
1305 TT
1309 TT
1314 TT




OPERATING CHARACTERISTICS

- Frequency inverter for the pump control.
- Adaptable to any connection box of the motor through a wide range of fastenings.
- ART function (Automatic Reset Test). If the device has been stopped due to the action of the safety system against dry operation, the ART tries to connect the pump, with a programmed periodicity because the water supply could have been restored.
- Automatic restore system after an interruption of power supply. System restores the previous state keeping the configuration parameters.
- Electronic input for detection of minimum water level in aspiration tank. This system is independent of the safety system against dry-running operation.
- Volt-free contact for monitoring the alarms displayed in screen originated by irregularities or problems of the system (optional).
- Control and information panel with LCD screen.
- Input 4-20 mA for an external pressure transducer.
- External pressure transducer 0-10 bar or 0-16 bar (under request).
- Inner current sensor with instantaneous digital reading.
- Register of operational controls. Information about: operating hours, counter of starts, counter of connections to the power supply.
- Register of alarms. Information about type and number of alarms since the starting up of the device.
- Open PID in the expert menu.
- Aluminium heat exchanger.
- Cooling by forced convection by the fan of the motor with an intelligent temperature management system.

TECHNICAL CHARACTERISTICS

	1006 MT	1010 MT	1106 MM	1112 MM	1305 TT - 1309TT - 1314TT
Power supply voltage	~1 x 230 Vac	~1 x 230 Vac	~1 x 230 Vac	~1 x 230 Vac	~3 x 400 Vac
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Output voltage	~3 x 230 Vac	~3 x 230 Vac	~1 x 230 Vac	~1 x 230 Vac	~3 x 400 Vac
Max current	6 A	10 A	6 A	12 A	5 A - 9 A - 14A
Max peak current	20% 10"	20% 10"	20% 10"	20% 10"	20% 10"
Range of set pressure	0,5 ÷ 16 bar 0,5 ÷ 10 bar	0,5 ÷ 16 bar 0,5 ÷ 10 bar	0,5 ÷ 16 bar 0,5 ÷ 10 bar	0,5 ÷ 16 bar 0,5 ÷ 10 bar	0,5 ÷ 16 bar 0,5 ÷ 10 bar
Protection degree	IP65 (or maximum of engine)				
Input transducer	4-20 mA	4-20 mA	4-20 mA	4-20 mA	4-20 mA
Max environment temperature	50 °C	50 °C	50 °C	50 °C	50 °C
Net weight (without cables)	2,1 kg	2,1 kg	2,1 kg	2,1 kg	3,5 kg
Cooling system	Natural Convection	Forced Convection	Natural Convection	Forced Convection	Forced Convection
	i/o: ~1/~3		i/o: ~1/~1		i/o: ~3/~3

CONTROL PANEL





Control panel includes LCD screen, warning leds, push-buttons, START-STOP, AUTOMATIC and configuration system.

SAFETY SYSTEMS

- Control and safety system against overcurrent.
- Electronic control and safety system against dry-running operation.
- Control and safety system against wrong supply voltage.
- Control and safety system against short-circuit between output phases

DIMENSIONS

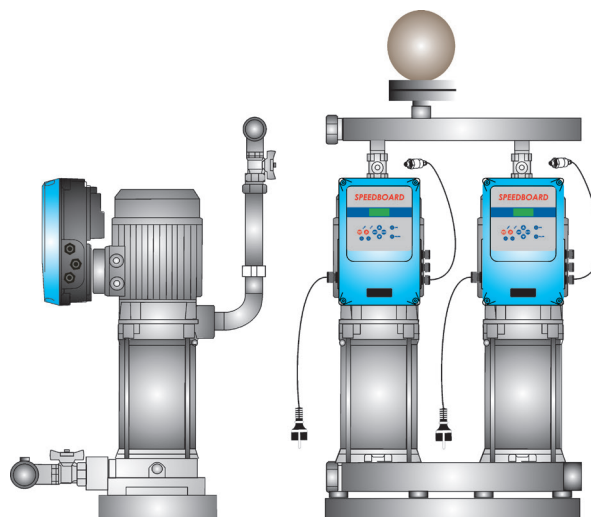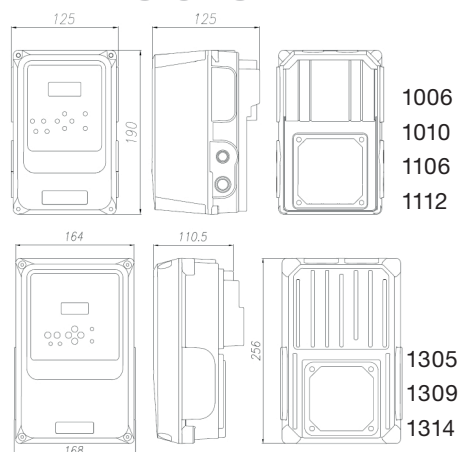

Coelbo Pump drivers